


Type: ps01-pa08v18-o4400-pt100-v2-66



- TEC output max.: 8A, 18V
 Supply Voltage: 24VDC ± 10%
- The controller has 1 universal Temp. Sensor Input (T1) for NTCs (standard 10 kΩ), PT100, PT1000 or others as well as 1 pt100 4-wire input (T2)
 - External Fan Support can be configured between 1..24V max. 800mA
 - Temperature Control Range: -25°C to 150°C
 - Accuracy typ. ±0.01K
 - Fast feedback loop P.I.D. temperature controller
 - Temperature limits
 - Current limits
 - f.e. "LTUS2"-command selects 2nd sensor as loop input


Peltier Connector

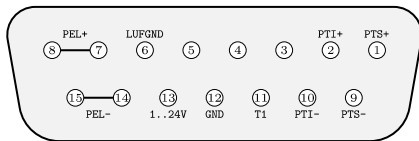

SubD-15. female

IN.No	Abbr.	Function
1	PTS+	T2 Temp PT100x +Supply 4-wire option
2	PTI+	T2 Temp PT100x +Input 4-wire option
6	LUF GND	Ground for Fan Supply
7;8	PEL+	Peltier element (+)
9	PTS-	T2 Temp PT100x -Supply 4-wire option
10	PTI-	T2 Temp PT100x -Input 4-wire option
11	T1	T1 Universal Temp. Sensor Input vs. GND
12	GND	Common Ground - N.C. To Screen
13	LUF	1..24V Supply, max. 500mA supports Fan and Other Loads
14;15	PEL-	Peltier element (-)
	SCR	Common Screen


Power and Support Connector for o44 devices



SubD-9 male

PIN.No	Abbr.	Function
2	ILOCK-	Laser runs only on closed Interlock
4;5	SUP+	Power Supply typ. +24V DC
7	ILOCK+	ca. 5mA over 2V, vs. ILOCK-
8;9	SUP0	Power Supply typ. 0V DC

RS232 Connector



SubD-9 female

Standard RS232-Connector
 (No Null-Modem Cable !)
 9600-Baud-8N1

PIN.No	Abbr.
2	RXD
3	TXD
5	GND

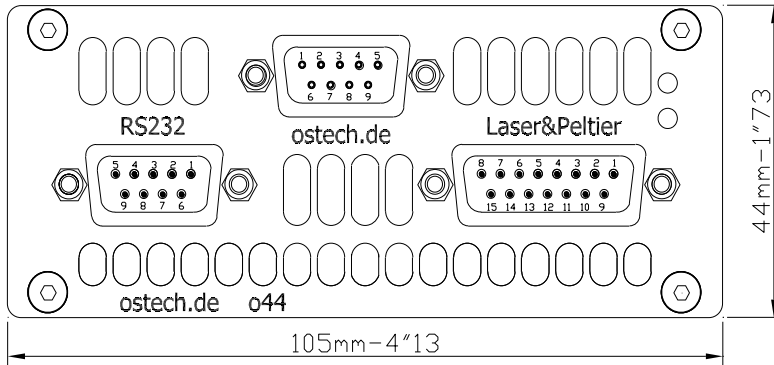


fig: ps01-Rear depth 160mm-6"3

Revision overview:

2015-10-03: „v1“ - Power Support Connector Pinout Changed, Temp. Sensor input to 1 Pin Version
 2020-04-30: „v2“ - now always pt100-4-wire supported on sensor 2

References:

- <http://www.ostech.de/en/products/tec-controllers/ps01-o44>
- <http://www.ostech.de/en/downloads/manuals/ds-en.pdf>
- <http://www.ostech.de/en/downloads/labview>

Accessories

- kab-lpa08-16pol-subd15m-oe-1.5m-39
 cable 16x0.35qmm SUBD15-Gold-6,5A/Pin to open end length 1m5
- acc-converter-usb-to-rs232-1m5-iso-417
 RS232 to USB converter optical isolated with FTDI-Chip cable 1.5m
- nt-90w-24vdc-oem-82
 power-supply vout-24V-3.8A-90W for-OsTech-OEM
 subd9-plug-for-ds01-o44-devices, vin-90~230AC"