


OsTech Cable

type 141: kab-la80-2x10qmm-5w5-oe-1.3m-141
type 657: kab-la80-2x10qmm-5w5-oe-2.5m-141-657
type 660: kab-la80-2x10qmm-5w5-oe-5.0m-141-660

1st end: Sub-D5W5, plug male type
 max. 40A per Pin
 2nd end: version0: open ends (standard)
 version1: M5-cathode / end 7cm blue and M4-anode / end 9cm red
 cable lugs, ring tongue
 Wires: 2x 10mm²
 I_{max}: 80A
 Length Type 141: 1.3m
 Length Type 657: 2.5m
 Length Type 660: 5.0m



Laser Connector Cable

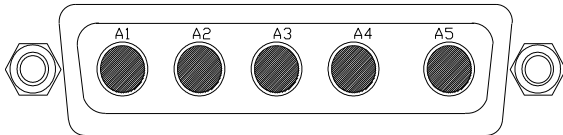

Sub-5W5, male Type

PIN.No	Abbr.	Function referring to OsTech driver layout
A3;A4	LDA+	Laser Diode Anode (+), cable-core
A1;A2	LDC-	Laser Diode Cathode (-), cable-screen
A5	n.c.	